

Features

- Excellent dust-proof performance with separate compartment design
- Built-in LiFePO4 lithium battery
- Intuitive display of battery SOC via 5-bar indicator lights
- Multiple DC output ports (5VDC/3A ports, 12VDC/2A ports, Type C ports)
- Large-sized LCD screen to monitor and modify system parameters
- Optional 4G or WiFi module to remote control the inverter/charger by the RS485 com. port
- AC input overload relay for disconnecting from the grid when the fault occurs
- Circuit breaker on PV input for equipment safety
- Circuit breaker on battery output for battery safety
- AC charging with PFC technology, high power factor for efficient energy consumption
- Bidirectional high-frequency transformer isolation topology
- Advanced MPPT technology: maximum tracking efficiency $\geq 99.5\%$
- EMC design on AC output to avoid interference with AC load
- Long-term continuous operation at full power
- Pure sine wave output
- Comprehensive electronic protection

Home Battery Backup



MacBook
7105mAh $\approx 105+$ times



Rice Cooker
600W $\approx 4+$ hours



iPhone
2942mAh $\approx 262+$ times



Television Set
100W $\approx 25+$ hours



Coffee Maker
900W $\approx 2.7+$ hours




Electric Oven / Toaster Oven
800W ≈ 3.2 hours



Impact Drill
1100w $\approx 2.2+$ hours

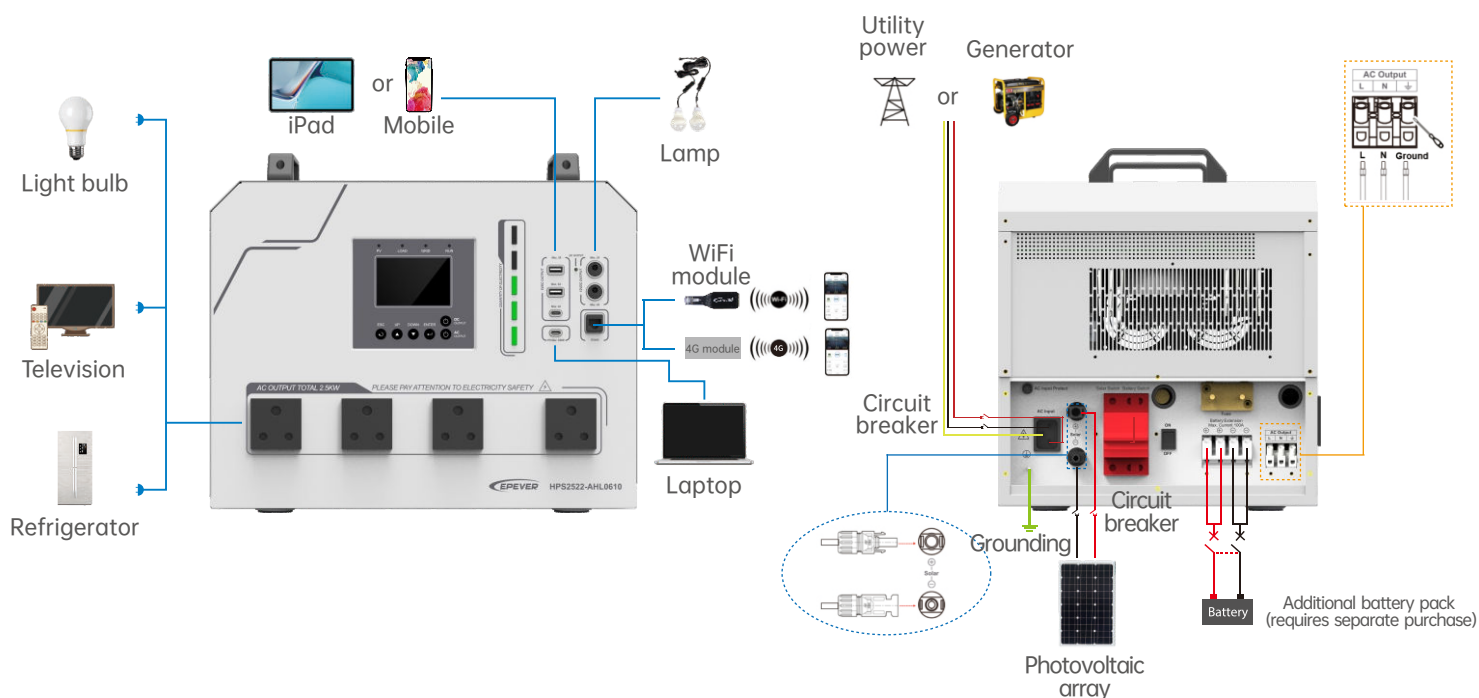


Car Refrigerator
62W $\approx 40+$ hours

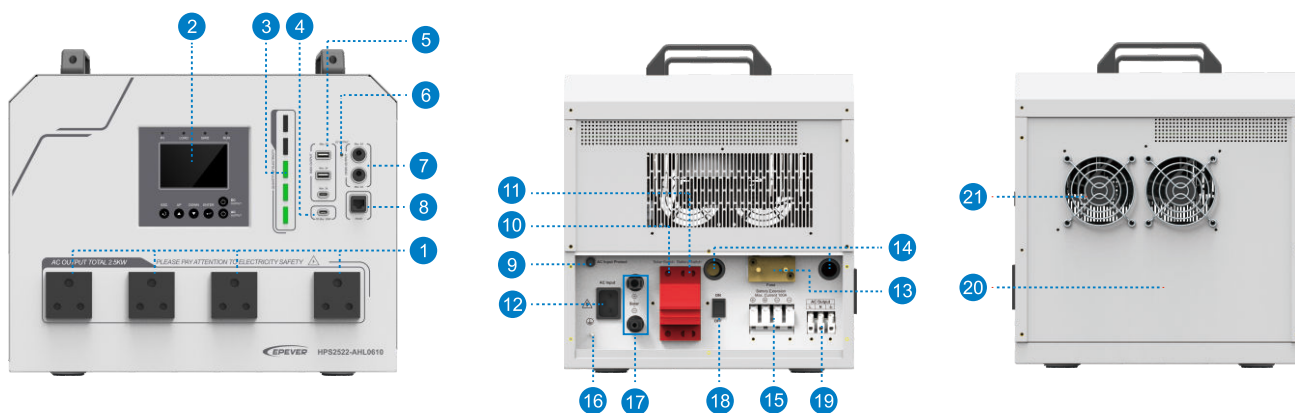


Model	HPS2522-AHL0610
Utility Input	
Utility Rated Voltage	220VAC
Utility Voltage	200~240VAC
Failure Voltage	290VAC
Utility Frequency	50Hz/60Hz
Utility Maximum Work Current (Charging + Bypass)	15A@220VAC
Switch Response Time	Switch Response Time-Utility to Inverter: $\leq 20\text{ms}$ Switch Response Time-Inverter to Utility: $\leq 20\text{ms}$
AC Input Overload Relay	HAVE
Inverter Output	
Inverter Rated Power (@25°C)	2500W
4-second Transient Surge Output Power	4500W
Inverter Output Voltage	220VAC $\pm 3\%$
Inverter Frequency	50Hz/60Hz $\pm 0.2\%$
Output Voltage Waveform	Pure sine wave
Output Voltage Harmonic Distortion Rate	$\leq 3\%$ (Resistive load)
Output Gradual Start	HAVE
Solar Controller	
PV Maximum Input Withstand Voltage	95VDC (at minimum operating environment temperature)
Solar Controller Type	MPPT
MPPT Maximum Efficiency	$\geq 99.5\%$
MPPT Voltage Range	24~76VDC
MPPT Input Channels	One way
PV Maximum Charging Current	60A
Battery	
Battery Type	LFP8S1P
Battery Rated Capacity	100Ah
Cell Dimension	Length: 160.0 $\pm 0.8\text{mm}$ Height: 118.5 $\pm 0.5\text{mm}$ Width: 50.1 $\pm 0.5\text{mm}$
Battery Rated Voltage	25.6VDC
Maximum Continuous Charging Current	1C
Maximum Continuous Discharging Current	1C
Battery Work Voltage Range	21.0VDC~30.0VDC
Battery Work Temperature Range	Discharging Mode: -20°C~50°C Charging Mode: 0°C~50°C
Cycle Times	5000 times
DC Output	
12V DC Output (x2)	12V $\Rightarrow$ 2A, Max. 24W/port, Total 48W
USB-A Output (x2)	5V $\Rightarrow$ 3A, Max. 15W/port, Total 30W
USB-C Output (x1)	5V $\Rightarrow$ 3A, Max. 15W
USB-C Output (x1)	5/9/12/15V $\Rightarrow$ 3A, 20V $\Rightarrow$ 5A, Max. 100W
DC Output Switch	HAVE
Others	
Work Temperature Range	-20°C~50°C (when the environment temperature exceeds 30°C, the charging power and load power will be reduced appropriately; working of full load is not supported.)
Enclosure	IP30
Communication Method	Bluetooth, RS485 (WiFi optional)
LCD	Monochrome LCD, English interface
Warranty	Two years
Dimension (Length x Width x Height)	427x325.4x368mm (with floor mats and handles)
Net Weight	37.0kg

Solar System Connection














Product Information



- | | | |
|---------------------------|-----------------------------------|-------------------------------|
| 1 AC outlet | 8 RS485 com. port | 15 Extension battery terminal |
| 2 LCD | 9 Utility bypass overload relay | 16 Grounding terminal |
| 3 Battery SOC indicator | 10 PV input circuit breaker | 17 PV input terminals |
| 4 USB-C port (100W PD) | 11 Battery output circuit breaker | 18 Power switch |
| 5 5VDC/3A output port *3 | 12 AC input port | 19 AC output terminal |
| 6 DC output indicator | 13 Extension battery fuse | 20 Battery container |
| 7 12VDC/2A output port *2 | 14 Outlet holes | 21 Cooling fan |

Recommended Component Configuration Table

Specification	Size	Power	Recommended PV module	PV voltage range	Recommended PV connection
Polycrystalline	1470x670x28mm	165~170W		30V~95V	2 in series, 2 in parallel 45V
					3 in series, 2 in parallel 68V
Monocrystalline	1580x710x28mm	220~235W		30V~95V	2 in series, 2 in parallel 53V
					3 in series, 2 in parallel 80V
Monocrystalline	1570x765x28mm	250~260W		30V~95V	2 in series, 2 in parallel 53V
					3 in series, 2 in parallel 80V
Polycrystalline	1640x992x30mm	270~280W		30V~95V	1 in series, 2 in parallel 38V
					2 in series, 2 in parallel 76V
Polycrystalline	1956x992x30mm	330~350W		30V~95V	1 in series, 2 in parallel 45V
					2 in series, 2 in parallel 90V
Monocrystalline	1755x1038x30mm	370~380W		30V~95V	1 in series, 2 in parallel 45V
					2 in series, 2 in parallel 90V
Monocrystalline	2094x1038x30mm	450~470W		30V~95V	1 in series, 2 in parallel 53V
Monocrystalline	1722x1134x28mm	400~415W		30V~95V	1 in series, 2 in parallel 40V
					2 in series, 2 in parallel 80V
Monocrystalline	2279x1134x30mm	540~555W		30V~95V	1 in series, 2 in parallel 53V
Monocrystalline	2204x1303x35mm	590~600W		30V~95V	1 in series, 2 in parallel 53V
Monocrystalline	2384x1303x35mm	650~670W		30V~95V	1 in series, 2 in parallel 53V

*This table should be validated based on the limit open-circuit voltage at the lowest temperature , and it is not allowed to exceed 95V under any conditions.